

PC-4-12 (Corcel II)

Battery Charger

max. 4A

Country of Origin : China
 Operating Temperature : $-20 \div 50[^\circ\text{C}]$
 Dimension : 195 x 130 x 95 [mm]




Approvals / Marks :



Features:

- Controlled by microprocessor.
- Mobility, handy and easy to use with cord management.
- 2 LED's lighting.
- Regeneration battery from 3.5V!!
- Desulphation – Pulse charging breakdown the lead sulphate crystals to extend battery life cycle.
- (1.2÷120)Ah / 12V (Wet, MF, AGM, GEL)
- Prevent sparks during DC clips connecting.
- Two tack switches for 3 charging modes.
- Ideal for motorcycle, ATV, snowmobile and auto boat.
- 6 charging steps.
- RoHS conform. IP65 waterproof.

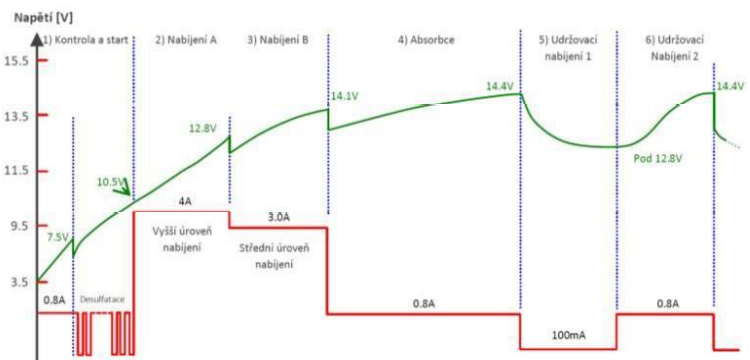

Specification:

Specifications		Model
Category	Description	PC-4 (Corcel II)
INPUT	Cable	EN50075 (built in)
	AC Voltage	(200 ÷ 240)V
	Frequency	(47 ÷ 63)Hz
OUTPUT	DC Voltage	12V
	Charger Voltage	14.7VDC±0.25V@“3” mode 14.4VDC±0.25V@“2” mode 14.4VDC±0.25V@“motorcycle” mode
	Charger Current	Max 0.8A @ “Motorcycle” mode Max 4A @ “Car” mode
	Battery type	>1.2Ah 12V Lead-Acid (Wet, MF, AGM, GEL)
	Float stage	13.6±0.5V
	Recommended Battery Type	Lead acid
ENVIRONMENT	Recommended Battery Size	1.2÷120Ah
	Ambient temperature	(0 ÷ 40)°C
	Relative Humidity	80% max. non-condensing
Dust Intrusion & waterproof		IP65
SAFETY		
Approvals		CE, IP65
OTHERS	WEIGHT	N.W.: 0.69 kg/pc
	PACKING - Box	0.56 x 0.29 x 0.44 [m]
		10pcs / 1box
		G.W.: 12 kg / box