


Country of Origin : China
 Operating Temperature : -20 ~50 [°C]
 Dimension : 80 x 55 x 33.5 [mm]
 Led Driver : Constant Current
 Approvals / Marks :



GREEN MODE



Efficiency level (ErP)



Features:


LED driver – constant current 0.6A~2.5A / 12V~24V	Designed and certified also for IEC320-C7 cable & inlet C8 (T2).
Suitable also for mounting on materials of B, C1, C2 flammability grades B, C1, C2	
Over load, over voltage & short protection.	
Wide range Input (90 ~ 264)VAC / (47 ~ 63) Hz.	

Specification:

Model	Current DC [A]	Loading [A]	Tolerance [V]	OUTPUT							
				OCP [A]	OVP Max [V]	OTP [°C]	Efficiency [%]	Max. Power [W]	Ripple & Noise [V]p-p	Connector [mm] UL approved	
ErP V.	LED1011-151250CC-W2E	1.250	1.1250~1.3750	11.4~12.6 (12V)	N/A	13.2~17.4	115	≥ 79.15	15	1.2	(*)
	LED1011-302500CC-W2E	2.500	2.2500~2.7500	11.4~12.6 (12V)	N/A	13.2~17.4	115	≥ 83.49	30	1.2	(*)
	LED1011-15700CC-W2E	0.700	0.6000~0.8000	13.7~19.2 (19V)	N/A	20.0~25.0	115	≥ 76.00	15	1.5	(*)
	LED1011-150625CC-W2E	0.625	0.5625~0.6875	22.8~25.2 (24V)	1.5~3.0	26.4~31.8	115	≥ 79.15	15	2.4	(*)
	LED1011-301250CC-W2E	1.250	1.1250~1.3750	22.8~25.2 (24V)	1.2~2.5	26.4~31.8	115	≥ 83.49	30	2.4	(*)


INPUT	Voltage	(90 ~ 264) VAC
	Frequency	(47 ~ 63) Hz
	Current	1.2A rms@ 100V AC and DC output full load
	Surge Current max.	40/60Amax. @ power supply cold start, ambient temperature 25°C @100ac/240Vac nominal AC input.
	Leakage current	0.25mA Max.
PROTECTION	Over load	OCP The power supply shall be self-recovering when the fault condition is removed.
	Over Voltage	OVP The power supply shall be self-recovering when the fault condition is removed.
	Short Circuit	Automatic recovery
	Over Temperature	115°C Transformer
	Power Factor	0.9 Min 100% load
OTHERS	Protection class	II.
	Dielectric Strength	I/P-O/P (FG): 3KVAC / 10mA / 1 min
	Turn on delay	5000 ms max. @ AC low line input @ output full load
	Hold-up Time	10ms min@ AC nominal Input and Output full load (1 half cycle)
	MTBF Qualification	50K hours full rated load operation at 25°C, according to the MIL-STD-217F.
	DC cable & connector	2468#22AWG*2C/4.5FEET PVC BLACK 80°C or depends on request
	Efficiency (typical)	The efficiency shall be higher than ≥ 76% typical while measuring at nominal line and maximum load. (Meet Energy Star level V)
	Power Consumption	The input power should less than ≤ 0.3W with output no load at 115VAC/230VAC input.
	Burn-in	2h
	Cooling	With convection cooling
ENVIRONMENT	Input Fuse	2.0A protected against power line surges and any abnormal conditions
	Temperature	Operating: (-20 ~ 50)°C / Storage: (-20 ~ 80)°C
	Humidity	Operating: (10 ~ 90)% RH / Storage: (20 ~ 90)% RH non condensing
SAFETY	CE TUV/GS	
EMC	EN55015:2009 EN61000-3-2:2009 EN61000-3-3:2008 EN 61547: 1995+A1: 2000	
WEIGHT	1pc	N.W.: 167g / pc
PACKING	Box	0.5 x 0.38 x 0.36 [m]
		60 pcs / 1box
		G.W.: 12kg / box

Mechanical case and cable specification:

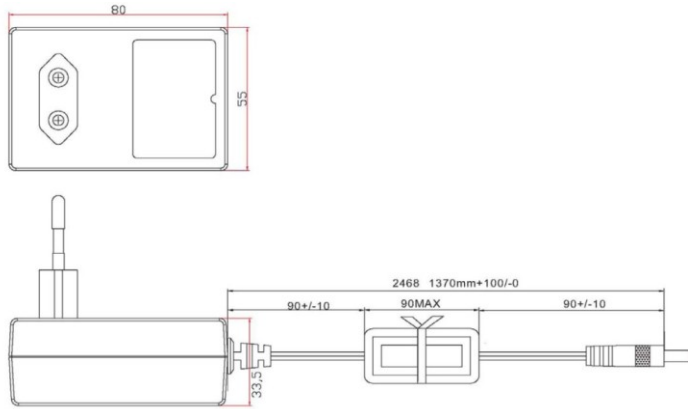


Output CHART's:


@ LED1011-151250CC-W2E

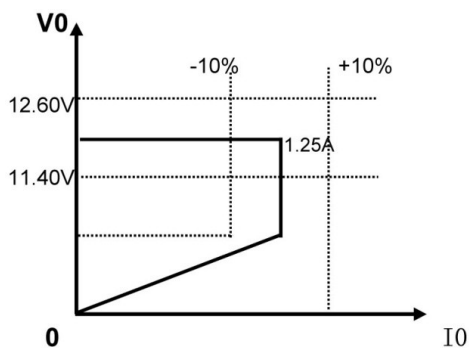


@ LED1011-302500CC-W2E

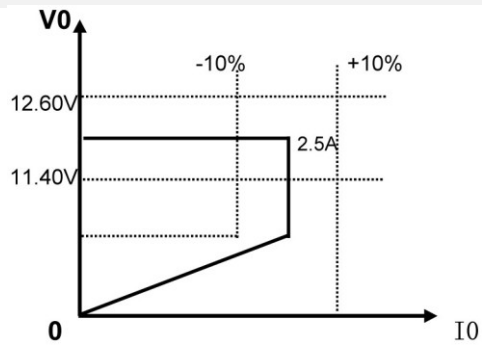

@ LED1011-15700CC-W2E

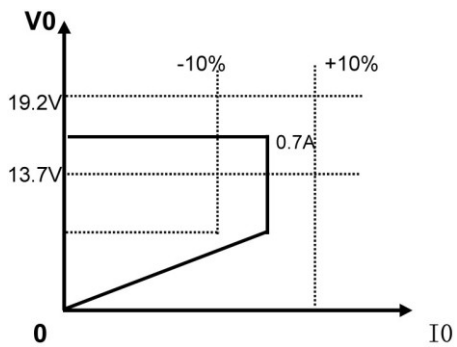

@ LED1011-150625CC-W2E

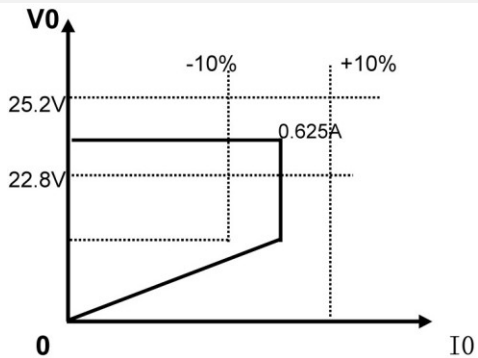

@ LED1011-301250CC-W2E

