

Country of Origin : China
 Operating Temperature : -20 ~50 [°C]
 Dimension : 131 x 65 x 34.5 [mm]
 LED Driver : Constant Current
 Approvals / Marks :



Efficiency level (ErP)



GREEN MODE



Features:

LED driver Desktop – Constant Current	Wide range Input (90 ~ 264)VAC / (47 ~ 63) Hz.
Suitable also for mounting on materials of B, C1, C2 flammability grades B, C1, C2	
Over load, over voltage & short protection.	

Specification:

ErP V.	Model	OUTPUT									
		Current [A]	Loading [A]	Tol. [V]	OCP [A]	OVP Max [V]	OTP [°C]	Efficiency [%]	Max. Power [W]	Ripple & Noise [V]p-p	Connector [mm] UL approved
	LED1011-605000CC-T2	5	4.5~5.50	11.4~12.6 (12V)	N/A	13.2~17.4	115	≥87	60	1.2	(*)
	LED1011-602500CC-T2	2.5	2.25~2.75	22.8~25.2 (24V)	1.5~3.0	26.4~31.8	115	≥87	60	2.4	(*)

INPUT	Voltage	(90 ~ 264) VAC
	Frequency	(47 ~ 63) Hz
	Current	2A rms@ 100V AC and DC output full load
	Surge Current max.	40/60Amax. @ power supply cold start, ambient temperature 25°C @100ac/240Vac nominal AC input.
	Leakage current	0.25mA Max.

PROTECTION	Over load	OCP	The power supply shall be self-recovering when the fault condition is removed.
	Over Voltage	OVP	The power supply shall be self-recovering when the fault condition is removed.
	Short Circuit		Automatic recovery
	Over Temperature		115°C Transformer
	Power Factor		0.9 Min 100% load
	Protection class		II.

OTHERS	Dielectric Strength	I/P-O/P (FG): 3KVAC / 10mA / 1 min
	Turn on delay	5000 ms max. @ AC low line input @ output full load
	Hold-up Time	10ms min@ AC nominal Input and Output full load (1 half cycle)
	MTBF Qualification	50K hours full rated load operation at 25°C, according to the MIL-STD-217F.
	DC cable & connector	2468#16AWG*2C/4.5FEET PVC BLACK 80°C or depends on request
	Efficiency (typical)	The efficiency shall be higher than ≥87% typical while measuring at nominal line and maximum load. (Meet Energy Star level V)
	Power Consumption	The input power should less than ≤0.3W with output no load at 115VAC/230VAC input.
	Burn-in	2h
	Cooling	With convection cooling

ENVIRONMENT	Temperature	Operating: (-20 ~ 50)°C / Storage: (-20 ~ 80)°C
	Humidity	Operating: (10 ~ 90)% RH / Storage: (20 ~ 90)% RH non condensing


SAFETY	CE TUV/GS
---------------	--------------------

EMC	EN55015:2009 EN61000-3-2:2009 EN61000-3-3:2008 EN 61547: 1995+A1: 2000
------------	--

WEIGHT	1pc	N.W.: g / pc
---------------	-----	--------------


PACKING	Box	0.555 x 0.385 x 0.360 [m]
		45 pcs / 1box
		G.W.: kg / box

Mechanical specification:

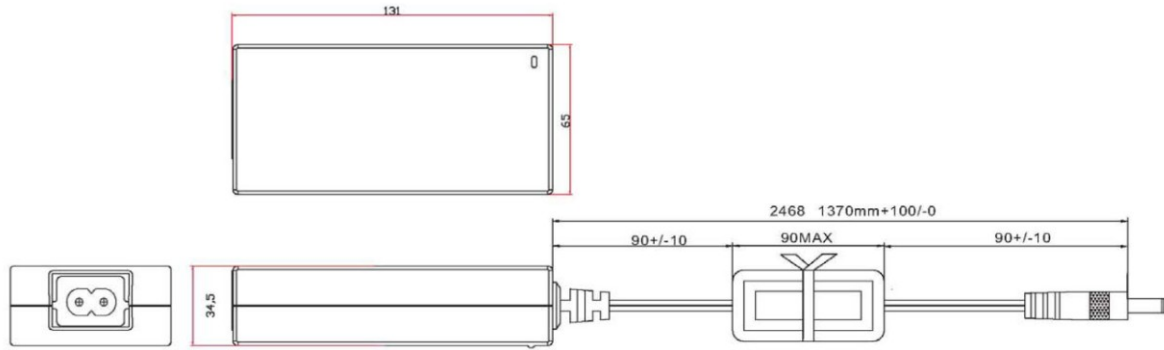


Output "V-A" Chart's:

@ LED1011-605000CC-T2

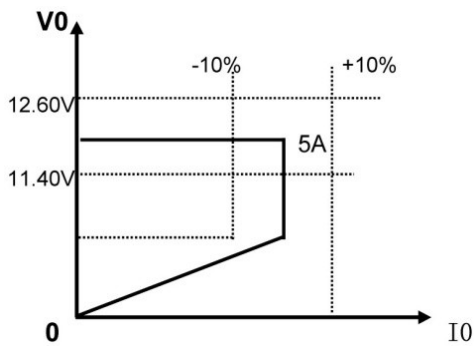

@ LED1011-602500CC-T2

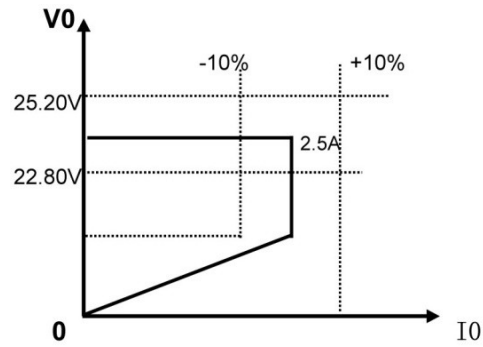

Cable specification:

