

SPS-320P Series

320W, Single Output
Active P.F.C Function



212 x 115 x 50 mm
8.35 x 4.53 x 1.97 inch




Features:

- * Universal AC input with active power factor correction, P.F.>0.95
- * Built in EMI filter, low ripple noise
- * Over load, over voltage, short circuit protection
- * Over temperature protection (Option)
- * Output voltage $\pm 10\%$ adjustment
- * Remote Control ON/OFF (Optional)
- * Output voltage remote sense
- * Cooling fan auto sensing ON/OFF
- * Non min load requirement
- * 100% 50°C burn-in test
- * UL, cUL, TUV, ,CB, CE standard
- * 2 years warranty

Specification:

MODEL		SPS-320P-3.3	SPS-320P-05	SPS-320P-7.5	SPS-320P-12	SPS-320P-15	SPS-320P-24	SPS-320P-30	SPS-320P-48
OUTPUT	Voltage	3.3V	5V	7.5V	12V	15V	24V	30V	48V
	Min. Load	0A							
	Max. Load	50A	50A	40A	26.7A	21.4A	13.4A	10.7A	6.7A
	Regulation	$\pm 3\%$	$\pm 2\%$				$\pm 1\%$		
	Ripple Noise _(max)	50mV	70mV	80mV	100mV	120mV	150mV	200mV	250mV
	Efficiency (tpy)	68%	75%	77%	80%	80%	83%	84%	84%
MAX OUTPUT WATTAGE		165W	250W	300W	320W				
INPUT	Voltage	85V --- 264VAC Universal full range, single phase, or 120V --- 375VDC							
	Frequency	47 ----- 63 Hz							
	Current	4.3A max at 100V AC input, full load condition							
	Inrush Current	<25A@115V / <50A@230V AC input, full load condition. Cold start at 25°C ambient							
	Leakage Current	<1.5mA@264V AC input							
	Power Factor	Meet IEC 1000-3-2 class D, P.F.>0.95							
PROTECTION	OverLoadProdtection	Over 105% ~ 150% of rating, recovers automatically after fault condition has been removed.							
	OverVoltageProdtection	3.8V~4.6V	5.8V~7.0V	8.6V~10.5V	13.8V~17.5V	17.3V~21V	27.6V~33.6V	31.1V~37.8V	55.2V~67.2V
	OverTemProdtection	Option							
	ShortCircuitProdtection	Shutdown, recovers automatically after fault condition has been removed.							
OTHERS	Rise time	<20mS							
	Hold up time	>20mS@230V							
	Remote Control	Optional							
	Cooling	A 13.7CFM (min.) DC ball bearing Fan, auto working when internal temperature reach 35°C $\pm 4^{\circ}$ C							
Environment	Temperature	Operating: 0~70°C; derating: 50°C ~70°C : 2.5%/°C. Storage: -10~+75°C							
	Humidity	Operating: 20% ~ 85%; Storage: 10% ~ 95% (non condensing)							
M.T.B.F.		250K hours							
SAFETY		UL 60950, CSA C22.2 No.60950, TUV EN 60950, IEC 60950, EMKO-TSE (74-SEC)207/94 Certified							
EMC	EMI	FCC CFR 47 PART 15 CLASS B, EN 50081-1, CNS 13438 CALSS B.							
	EMS	EN 50082-1 (1997)							
PACKING		N.W.: 1.2Kg / 1pc; 14pcs / 1.38 Cu ft ³ / 1 CTN							

Dimension:

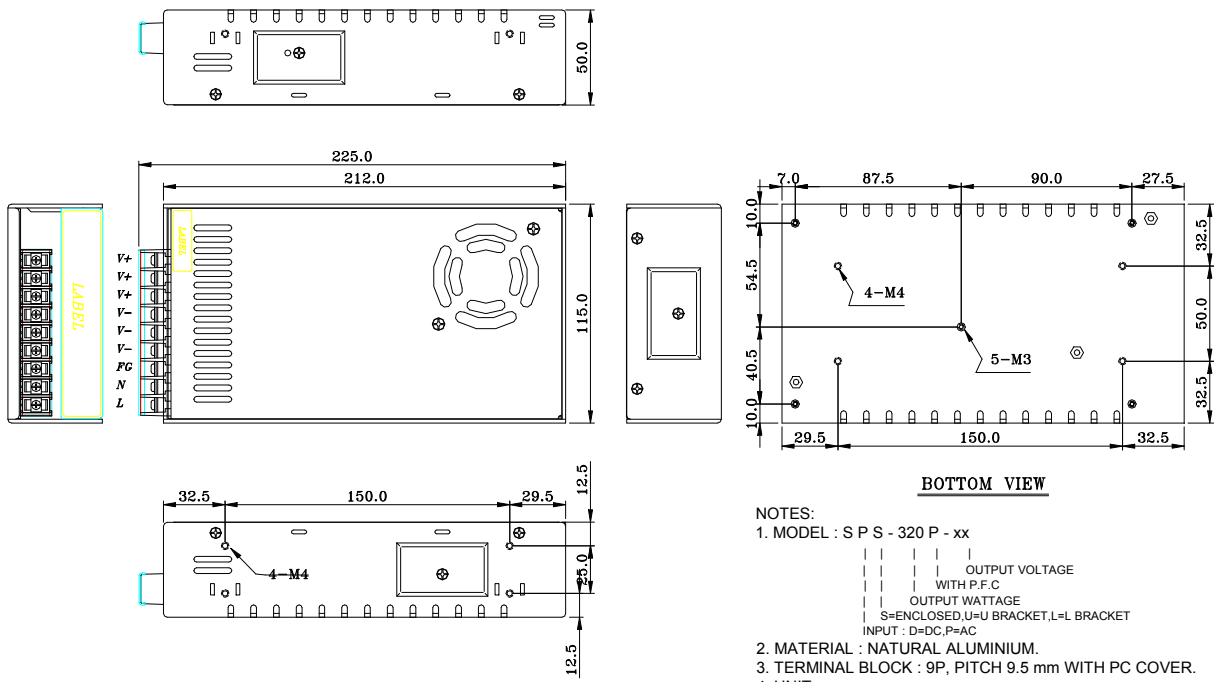

BOTTOM VIEW

NOTES:

1. MODEL : S P S - 320 P - xx

----- OUTPUT VOLTAGE
 ----- WITH P.F.C
 ----- OUTPUT WATTAGE
 S=ENCLOSED,U=U BRACKET,L=L BRACKET
 INPUT : D=DC,P=AC

2. MATERIAL : NATURAL ALUMINIUM.

3. TERMINAL BLOCK : 9P, PITCH 9.5 mm WITH PC COVER.

4. UNIT : mm.