

Country of Origin : China  
 Operating Temperature : -15 ~ 50° C  
 Dimension : 104 x 45 x 76 mm  
 Approvals / Marks : UL, CSA, CE




### Features:

Single Output with Universal input 100~240 VAC  
 Installable on DIN rail TS35 / 7.5 or 15  
 Overload & over voltage protection  
 Short circuit shutdown & auto recovery  
 100% burn-in tested  
 1 year warranty

### Specification:

MODEL	DRP-024D-05FT	DRP-024D-12FT	DRP-024D-24FT	
Voltage (VDC)	5V	12V	24V	
min. Load	0A	0A	0A	
Rated Load	4A	2A	1A	
max. Load	4A	2A	1A	
Tolerance	± 1%	± 1%	± 1%	
Ripple & Noise (max)	50mV	100mV	150mV	
Efficiency (min)	72%	75%	76%	
Max. Output Power	24W			
Output Voltage adjustment range	± 10%			
INPUT	Voltage	Universal input 100~240 VAC or 127~380VDC		
	Frequency	47 ~ 440 Hz		
	Current	0.5A max.		
	Inrush Current	<40A@220VAC @ 25°C		
PROTECTION	Overload	auto power limiting		
	Over Voltage	> 11VDC auto recovery	> 22VDC auto recovery	> 44VDC auto recovery
	Over Temp.	-		
	Short Circuit	Shutdown, auto recovery after fault has been removed		
OTHERS	Holdup time	> 16ms @ 110VAC		
	Cooling	Free air convection		
	Vibration	2G, 10~500Hz, 3 axes		
Environment	Temperature	Operating: -15 ~ 50°C / Storage: -20 ~ 85°C		
	Humidity	Operating: 5% ~ 95% RH (non condensing)		
M.T.B.F.	> 350K hours (according to MIL-HDBK-217F at 25°C environment)			
SAFETY	Approved:	UL 60950 / CSA 60950 / CE		
EMC	EMI	EN55022 Class B / EN 61000-3-2, 3		
	EMS	EN55024 / EN61000-4-2,3,4,5,6,8,11		
WEIGHT	N.W.: 150g			

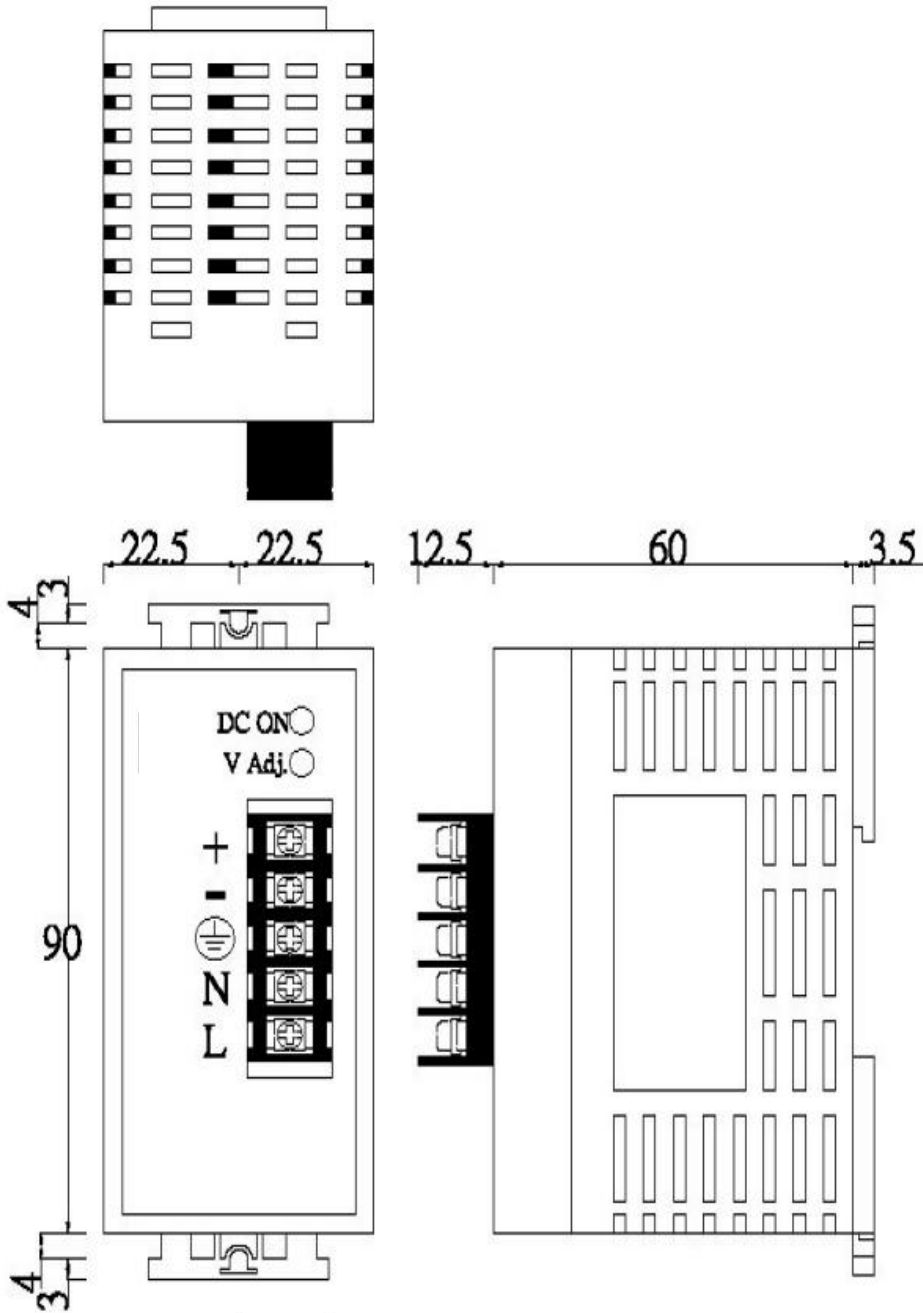

SYMBOL	DESCRIPTION
N	Neutral Terminal of AC Input (No Polarity at DC Input)
L	Line Terminal of AC Input (No Polarity at DC Input)
⊕	Grounding (Earth)
-	DC Negative Output Terminal
+	DC Positive Output Terminal
V Adj.	Potentiometer for Output Voltage
DC On	Green LED Power Indicator